




Dri-zone Quick Drying Eco Hand Dryer

Adjustable Low Noise Level – Quick Hand Drying – Slim Easy Clean Profile
4 Amp High Speed Hand Dryer Ideal For Current Education Applications

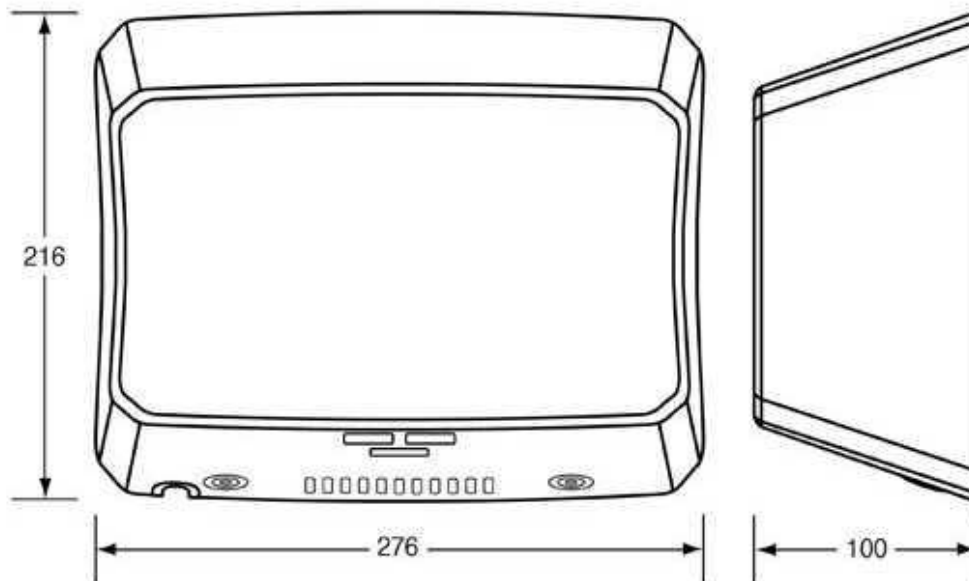

This hand dryer is ADA Compliant for disabled use having compact dimensions (In mm) of: 276w x 216ht x 100d, a Light Net Weight of 3.4 kg and comes with sloping sides top and base for a high-level self-harm protection.

The ergonomic vandal resistant cover is available in either Mild Steel with a White Epoxy Finish, or Stainless Steel (304) 1.2mm thick with a Bright Finish.

A Blue L.E.D light which provides a visible indication of the drying zone ensuring that the users hand's are always positioned in the warm air stream.

Featuring a low noise level of only 72.8 dB at 1 metre, and with an on/off heater switch this is truly a 4-amp machine. An Operation Power of only 1kw with the 0.5kw heater switched on, and a Standby Power Usage of less than 0.5w, makes this hand dryer very economic to run.

TECHNIFLOW LTD

Techniflow House, 6a Uddens Trading Estate, Stapehill, Wimborne, Dorset, BH21 7LQ
Tel: 01202 870770 - Email: techniflow@btinternet.com

TECHNIFLOW

TECHNICAL SPECIFICATIONS	
Size	276w x 216ht x 100d (Sizes in mm)
Weight	Nett Weight 3.4 kg
Cover Option	Mild Steel with a White Epoxy Finish
Cover Option	Stainless Steel (304 Grade) 1.2mm thick with a Bright Finish
Cover Security	2off SS theft resistant hex drive screws (hex key supplied)
Drying Time	13 to 15 seconds
Drying Nozzle	Patented parallel dual air outlets for a wide dispersal of air
Activation	Automatic (infra-red), 60-second safety shut-off
Comfort	Blue L.E.D light which provides a visible indication of the drying zone for maximum drying efficiency
Circuit Operation	Infrared Automatic, self adjusting
Timing protection	60 seconds auto shut off
Sound Level	72.8 dB at 1 metre
Air Speed	Adjustable Output of 35 - 70 m/s [79 - 158 mph]
Electrical Isolation	CLASS 1
Drip proof	IP23
Sensor Range	Self adjust
Operating Voltage	110-120V, 50/60Hz, 0.84-1.0kW; 220-240Vac, 50/60Hz, 0.84-1.0kW
Air Flow	1.523 Cubic Foot Per Minute
Fan	Completely enclosed, vandal resistant
Motor Type	Adjustable speed 11/16HP, 250 - 500W, 16000 - 29000 R.P.M, Brush Type: Dual Ball Bearings
Motor Thermal Protection	Auto-resetting Thermostat turns unit off at 105 degree C
Air Output Temperature	55 degree C, (Ambient Temp. 25 degree C)
Heater Element	500W
Heater Thermal Protection	Auto Resetting Thermostat turns unit off at 85 degree C
Certification	ADA / CE / WEEE / TUV
Suitability	Commercial and Industrial Facilities, Residential Facilities, Educational Facilities, Health Centres, Aged Facilities Care Homes, Learning Disability Centres, Research Facilities, Public Toilets, Disabled Toilets, Hospitality and Leisure Centres
Warranty	2 years Manufacturers On Site Warranty



TECHNIFLOW LTD

Techniflow House, 6a Uddens Trading Estate, Stapehill, Wimborne, Dorset, BH21 7LQ
Tel: 01202 870770 - Email: techniflow@btinternet.com